

# Automatic Chemical Regulation and Control Accessories

## Electrodes Buffer Solutions



Code	Description
SOL PH4	Buffer Solution pH4, Bottle of 75ml
SOL PH7	Buffer Solution pH7, Bottle of 75ml
SOL PH9	Buffer Solution pH9, Bottle of 75ml
SOL RX468	Buffer Solution 468mV, Bottle of 75ml
SOL RX650	Buffer Solution 650mV, Bottle of 75ml

## Chemical Tanks



### Specifications

- High resistance for acids and other chemicals with polyethylene body
- Rivetless, monoblock structure
- UV stabilized, no effect from sunlight, no bacteria cultivation material and technology.

Code	Model	Body Ø
D-TANK100	Atecpool Chemical Tank for Dosing PE body 100 ltr	470
D-TANK200	Atecpool Chemical Tank for Dosing PE body 200 ltr	610
D-TANK600	Atecpool Chemical Tank for Dosing PE body 620 ltr	830
D-TANK1040	Atecpool Chemical Tank for Dosing PE body 1040 ltr	1005

# Mixers for Dosing Tanks

## Manual Mixer

Manual mixers for medium tanks up to 200 ltr, PVC shaft and propeller.



MIX-MANGO

Code	Shaft Length (mm)
MIX-MAN60	600
MIX-MAN80	800

## Electrical Mixer 1400 rpm / High Speed Mixer

Electrical fast mixers, 1400 rpm. Direct motor driven. Fan and mixer shaft PVC material, shaft length 75 cm. Three bladed, fan diameter 9 cm.




MIX/FE 3-6

Code	Shaft Length (mm)	Power Supply	Motor Power / rpm
MIX/FE 3-6	750	380V- 3 phase - 50Hz	0,18kW / 1400 rpm
MIX/FE 1-6	750	230V - 1 phase - 50Hz	0,18kW / 1400 rpm

## Electrical Mixer 75 rpm / Low Speed Mixer

Electrical slow mixers, 75 rpm. Gear driven. Fan and mixer shaft PVC material, shaft length 75 cm. Two bladed, fan diameter 21 cm.

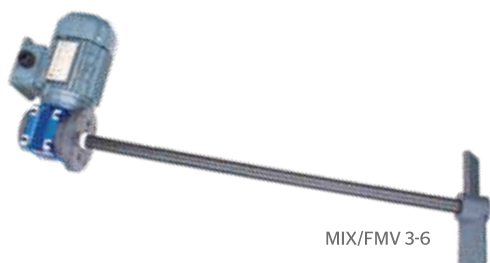

MIX/FMV 3-6

Code	Shaft Length (mm)	Power Supply	Motor Power / rpm
MIX/FMV 3-6	750	380V - 3 phase - 50Hz	0,18kW / 75 rpm
MIX/FMV 3-8	750	230V - 1 phase - 50Hz	0,18kW / 75 rpm